

Insutraction Manual A-E2BT24V

ENDURA Battery Adaptor for Panasonic 25.5-inch Monitor




Thank you for choosing the A-E2BT24V. A-E2BT24V is specially designed for providing DC power for Panasonic BT-3DL2550 and BT-LH2550 by ENDURA batteries. Please utilize this instruction manual to both safely operate and get the maximum use of your A-E2BT24V. If you have any additional questions, please contact the appropriate IDX office or visit our website www.idx.tv

Specifications


- Screw holes: VESA100 (100mm × 100mm)
- Dimensions: 118mm(W) × 160mm(H) × 49mm(D) * (Cable part not included)
- Weight: Approx. 550g / 1.22Lbs
- Screws: M4 × L8mm × 4
- Output voltage / current: DC24V/5A, DC5V/0.05A

XLR connector
Pin Assign

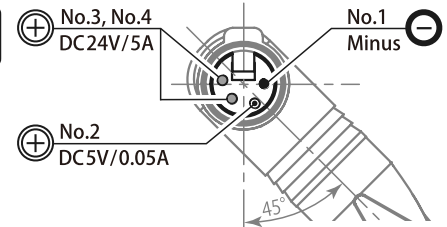

Installation

- ① Install an A-E2BT24V to Panasonic LCD monitor BT-3DL2550 or BT-LH2550 by using supplied screws. Screw holes are VESA100 standard. Please make sure that all the screws are tightly fitted.
- ② Attach the XLR connector to the monitor, taking care to note the direction of the pins.
- ③ Attach the ENDURA battery after completion of the set-up and then turn the monitor power switch on.
- ④ A-E2BT24V can be installed vertically or horizontally, as shown below. IDX recommends vertical installation when using the A-E241E.
* Operation time can be doubled by utilizing A-E241E.

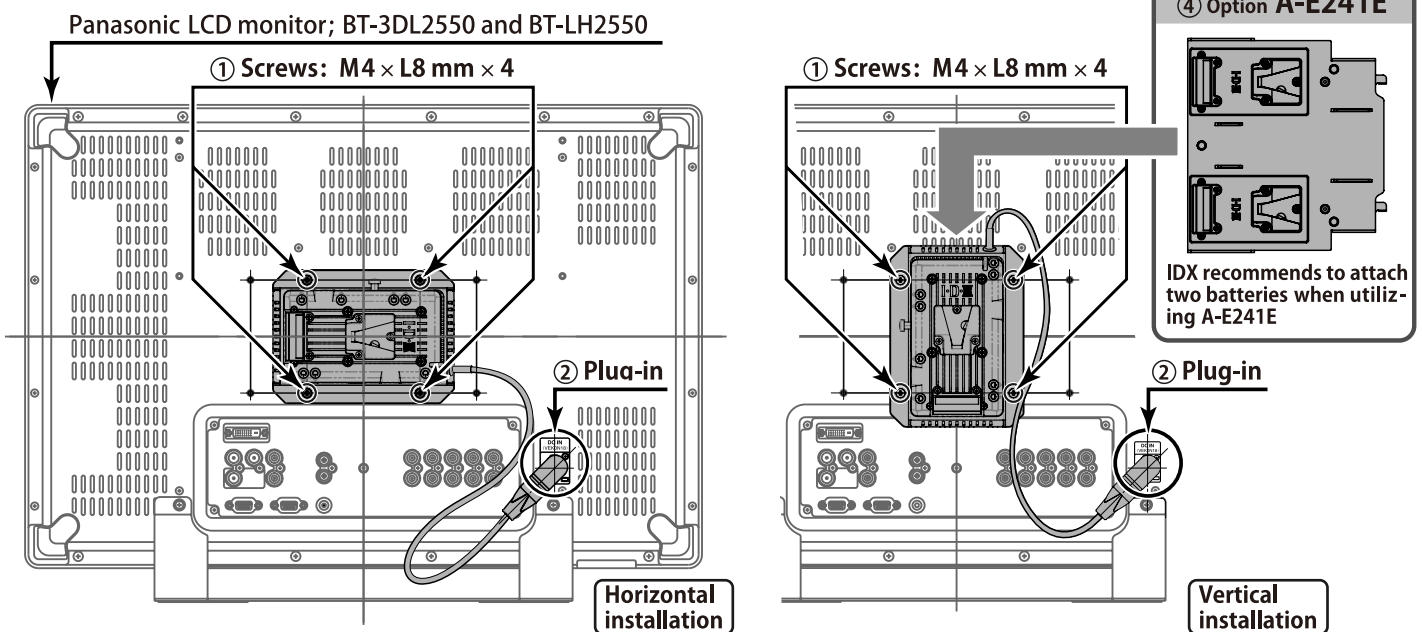

Recommendation

ENDURA ELITE, ELITE-S, E-HL9, E-HL9S

- IDX strongly recommends using ELITE, ELITE-S, E-HL9 or E-HL9S for this application.
- For power usage longer than an hour, IDX recommends either PowerLink mode (dual-stacking) with E-HL9 or use A-E241E for parallel dual mounting.
- To ensure optimum battery life, please use the same model together (such as two E-HL9S); batteries should be similar in charge level.

General Notes and Safety

- Do not attempt to open or modify this unit. All work should be carried out by IDX authorized service personnel only.
- When connecting a battery or adaptor to the equipment, make sure there is a solid connection. If it is not attached properly, it may result in loss or damage to the unit or even injury to the operator.
- Stop using immediately in case of abnormal smell, visible leak, color change or physical deformity during operation.
- If you need any inspection or repairs, please contact your IDX dealer or appropriate IDX office.

Designs and specifications are subject to change without notice. 2010 10